

Simulating City-level Airborne Infectious Diseases

Shan Mei^{1,2,*}, Xuan Zhou¹, Yifan Zhu¹, Zhenghu Zu³, Tao Zheng³, A.V. Boukhanovsky⁴, P.M.A. Sloot^{2,4,5}

¹National University of Defense Technology, P. R. China

²Computational Science, University of Amsterdam, Amsterdam, Netherlands

³Beijing Institute of Biotechnology, Academy of Military Medical Science, P. R. China

⁴National Research University ITMO, Russia

⁵Nanyang Technological University, Singapore

*Corresponding author. Telephone: (+)86-731-84573558, Fax: (+)86-731-84573535.

Email addresses:

SM: Meishan.ann@gmail.com

XZ: qiangjunxingguo@163.com

YZ: stephen.zhuyifan@gamil.com

ZZ: zzhbiot08@126.com

TZ: zhengtao@126.com

AVB: avb_mail@mail.ru

PMAS: P.M.A.Sloot@uva.nl

Abstract

With the exponential growth in the world population and the constant increase in human mobility, the danger of outbreaks of epidemics is raising. Especially in high density urban areas such as public transport and transfer points, where people come in close proximity of each other, we observe a dramatic increase in the transmission of airborne viruses and related pathogens. It is essential to have a good understanding of the ‘transmission highways’ in such areas, in order to prevent or to predict the spreading of infectious diseases. The approach we take is to combine as much information as is possible, from all relevant sources and integrate this in a simulation environment that allows for scenario testing and decision support. In this paper we lay out a novel approach to study Urban Airborne Disease spreading by combining traffic information, with geo-spatial data, infection dynamics and spreading characteristics.

Keywords: Geographical Information System (GIS), Multi-Agent Systems (MAS), Infectious Diseases, Epidemics

1. Introduction

City-level airborne epidemics is a threat to healthy living. With the exponential growth in the world population and the constant increase in human mobility, the danger of outbreaks of epidemics is raising. For example, the novel Influenza A (H1N1), also known as Human Swine Influenza/Swine Flu, spreading internationally from Mexico in 2009, has caused a serious epidemic in China. China is highly susceptible to pandemic influenza A (H1N1) due to its big population and high residential density. According to the Ministry of Health of China, until 30th Sep 2009, the provinces in China mainland had reported 19589 confirmed cases, 14348 cured cases, 10 sever cases and a few death cases ([Ministry of Health of China, 2009](#)).

In high density urban areas such as public transport and transfer points, where people come in close proximity of each other, we observe a dramatic increase in the transmission of airborne viruses and related pathogens. In order to elaborately model and simulate the airborne epidemics, the city under study needs to be modeled in detail from the infrastructural aspect. We utilize the Geographic Information System (GIS) technology to model the infrastructure of a city which might be threatened by certain epidemic attacks. GIS is a combination of database management capabilities for collecting and storing large amounts of geospatial data, together with spatial analysis capabilities to investigate geospatial relationships among the entities represented by that data, plus map display capabilities to portray the geospatial relationships in two- and three-dimensional map form (Nyerges et al., 2009). GIS facilitates storing, querying and visualizing city infrastructure including roads, regions with diverse functionality, public transportation and so forth. We also address path routing based on city transportation to capture transmissions that occur to localities, especially public transport. This is because in many developing countries such as China, the overly crowded public transportation usually escalates airborne epidemics.

On the basis of the geo-spatial information, we model a local population that dwell in a city under study and their spatio-dynamical behavior. There is growing recognition that the solutions to the most vexing public health problems are likely to be those that embrace the behavioral and social sciences as key players (Mabry et al., 2008). Human behavior plays an important role in the spread of infectious diseases, and understanding the influence of behavior on the spread of diseases can be key to improving control efforts (Funk et al., 2010). It is essential to have a good understanding of the ‘transmission highways’ in urban areas, in order to prevent or to predict the spreading of infectious diseases. Therefore, investigating into the patterns that are relevant for social contacts, and consequent airborne virus transmissions, is of great importance.

In this study lay out a novel approach to study Urban Airborne Disease spreading by combining traffic information, with geo-spatial data, infection dy-

namics and spreading characteristics. We combine as much information as is possible, from all relevant sources and integrate this in a simulation environment that allows for scenario testing and decision support.

2. Model

2.1. City Modeling

We discuss city modeling from the aspects of city partitions and traffic (road and public transportation) networks.

2.1.1. Regions and Sublocations

In order to construct a synthetic city, we break down major metropolitan areas into **regions** and **sublocations (SLs)** that reside inside each region. Regions, or land uses in some studies, are pieces of city land serving different purposes such as agriculture, commerce, medication and education etc. Sublocations, affiliated to a specific region, represent realistic-room like space where people conduct their daily activities and have social contacts.

Each region is categorized into types of agriculture, residence, hospital, school, university and recreation etc., due to the main facilities that it provides people with, as discussed in references (Valle et al., 2006; Del Valle et al., 2007; Yang et al., 2007). In this study we exclusively consider 6 types of regions – **housing (HR)**, **office (OR)**, **school (SR)**, **university (UR)**, **medical (MR)** and **recreational (RR)**. Such region partition asks for GIS files that comprise clearly partitioned land pieces, and these pieces can be mapped to the aforementioned 6 types of region, ignoring those regions (e.g., agricultural regions) that contribute less to the spread of diseases.

A region contains a set of sublocations of different classes. For example, a university region (UR) contains office sublocations (offices), residential sublocations (student dormitories and faculty members' home), classroom sublocations (classrooms, labs and library space), recreation sublocations (cafeteria, clubs, shops, refectories and restaurants etc.) and possibly hospital sublocations. Specifically, the recreational class includes shops, restaurants, cinemas,

supermarkets and all other relevant places which provide services of recreation, relaxation or sales of life necessities. In this study we classify sublocations as **housing (HS)**, **office (OS)**, **classroom (CS)**, **patient room (PS)** and **recreational (RS)**. Table 1 lists the classifications of regions and secondary sublocations in detail.

TABLE 1

Additionally, each sublocation is characterized as being either indoor or outdoor, conveying different transmission probabilities of viruses inside the space. For many airborne viruses, outdoor conditions such as sunshine, heat, wind blow and air circulation can lower the infection probability between the infected and the susceptible.

2.1.2. The Road and Public Transportation Networks

The whole city traffic routes are modeled as a road network (RN) and a public transportation network (PTN).

The assemblage of roads in a city can be mapped to a road network (RN). Roads, as the transport infrastructure of a city, are composed of road sections and crossings. We build up the road network, denoting crossings by nodes and sections by edges, as shown in Fig. 1. Each edge, either a straight-line or a poly-line, stands for a head-tail combination of realistic sections. Edges can be 1-directional or 2-directional, indicating that they are corresponding to one-way or double-way road sections, respectively. A crossing joins several road sections together. The number of sections (usually 2, 3 or 4) that a crossing links to indicates the connectivity of the crossing. In this way, the whole city roadway can be mapped to a complex network¹ of vast nodes and edges. The degree of each node shows the number of neighboring sections that this crossing connects with. Obviously, the degree of nodes in this road network is greater than or equal to 1.

¹In the context of network theory, a complex network is a network with non-trivial topological features that mostly do not occur in simple networks such as lattices (Newman, 2003).

FIGURE 1

The assemblage of public transportation routes can be mapped to a public transportation network (PTN) in terms of lines and stops. The public transportation consists of many bus/tram and metro/train lines along which buses/trams and metros/trains operate frequently during day time. Buses/trams and metros/trains depart every few minutes from the starting stop of a line and move towards the destination stop. People get on or off at each stop alongside each line. A number of lines join at a stop to make transfer. Every line is composed of head-tail line sections. Similar to a crossing in the roadway, a line crossing joins several line sections together. Therefore, we construct the PTN by denoting crossings by nodes and sections by edges, while stops are scattered along both sides of each edge, as shown in Fig. 2. The route of a bus line in one direction passes six bus stops (displayed in square) No. 1-6 alongside three line sections, while it in the other direction passes stops No. 7-12 alongside the same three line sections.

FIGURE 2

2.1.3. Travel Routing

People travel within a city by foot, car, taxi, bike and public transportation. We discuss their travel routing by utilizing the previously constructed RN and PTN. For simplicity, we focus on the mobility of people inside the city under study, leaving out of consideration the relatively less common commutes between cities.

For travels by means of other than public transportation, we consider travel routing in two ways. On the one hand, people move along a straight line connecting the start-point (P_s) and the end-point (P_e) for very short distances, say, when $Distance(P_s, P_e) \leq 3$ km. So $Path = L(P_s, P_e)$ where L denotes the line between the two points. On the other hand, people move along the shortest or feasible paths in the RN for longer distances. The fundamental theoretic achievements in the field of complex networks can help seek the short-

est or feasible paths, for example by using the so-called Dijkstra algorithm for node-to-node shortest path computation. Thus, if $Distance(P_s, P_e) > 3$ km, the travel routing result will be the combination of 5 parts (see Fig. 3), i.e., $Path = L(P_s, N_{rs}) + L(N_{rs}, N_{ns}) + SP(N_{ns}, N_{ne}) + L(N_{ne}, N_{re}) + L(N_{re}, P_e)$, where N_{rs} is the nearest point on road (edges in RN) to P_s , N_{ns} is the nearest node (in RN) to N_{rs} , SP computes the shortest path (plotted in grey) between two points in RN (N_{ns} and N_{ne} in this case), N_{re} is the nearest point on road to P_e and N_{ne} is the nearest node to N_{re} . Additionally, the SP result can be substituted by other feasible paths if traffic avoidance needs to be considered.

FIGURE 3

Traveling by public transportation further complicates routing so that we design a breadth-first algorithm as illustrated in Fig. 4. Looking for the shortest paths in PTN unnecessarily solve the routing problem because buses/metros move along predefined stop-by-stop lines instead of shortest paths. We start with P_s and P_e , i.e., the start-point and the end-point. In order to compute paths based on public transportation, a set of stops close to P_s , denoted by S_1 , need to be obtained first. We search these stops within a given distance of P_s , and the resulting circle with center point P_s and given radius is called the *extension area* of P_s . We define the *extension operation* $Ex(stop, radius)$ as to get all the stops inside the circle with center point $stop$ and given *radius*. Thus $S_1 = Ex(P_s, radius)$. In the same way we can get E_1 , a set of close stops to P_e , utilizing the corresponding extension operation $Ex(P_e, radius)$. The two sets of S_1 and E_1 represent the getting-on stops and getting-off stops that people can choose for the sake of traveling from location P_s to P_e by public transportation.

The search operation continues iteratively. We denote the resulting set of stops from the i th search by S_i and the radius adopted for the i th search by $radius_i$. In order to conduct onward searching according to predefined line information, we define the operation of obtaining directly reachable stops of a given stop as $DR(stop)$, which produces a set of stops coming right next to the given stop in all passing-by lines. As shown in Fig. 4, for each stop in S_1 (three

in total except P_s), we can get its $DR(stop)$ set. As an illustration, in Fig. 4, each stop in S_1 is assumed to have only one directly reachable stop. Thus, the union of the stops inside the three extension areas (three big circles with dashed perimeter) leads to $S_2 = \bigcup_{stop_2 \in DRS} Ex(stop_2, radius_2)$ where $DRS = \bigcup_{stop_1 \in S_1} DR(stop_1)$. Therefore, The searching results starting from both P_s and P_e are given in Equ. 1 and Equ. 2, respectively.

$$S_i = \begin{cases} Ex(P_s, radius_1) & i = 1 \\ \bigcup_{stop_1 \in S_{i-1}} \bigcup_{stop_2 \in DR(stop_1)} Ex(stop_2, radius_i) & i \geq 2 \end{cases} \quad (1)$$

$$E_i = \begin{cases} Ex(P_e, radius_1) & i = 1 \\ \bigcup_{stop_1 \in E_{i-1}} \bigcup_{stop_2 \in DR(stop_1)} Ex(stop_2, radius_i) & i \geq 2 \end{cases} \quad (2)$$

The searching termination condition is that $\exists i, j, S_i \cap E_j \neq \emptyset$. With minimum transits firstly and less time consumption secondly taking priorities over others, we end up with the optimal routing from P_s to P_e , involving all the stops on the way and necessary transits. Please note that the radius parameter for each i th search, $radius_i$, is tunable. For example, we can set $radius_1 = 1$ km to search for stops within a radius of 1 km from P_s or P_e , and 0.05 km for the rest implying that transits between lines can only occur when the distance between 2 nearby stops is < 0.05 km. If the routing fails, which means that the algorithm ends up with $S_i \cap E_j = \emptyset, \forall i, j$, people need to resort to other traveling means, e.g., taxi. Arguably, in a maturely developed city, the possibility of routing failure is low and bearable for our simulations.

FIGURE 4

2.2. The Synthetic Population

In this study, each person is represented as an agent with own attributes and behavior, based on the Multi-Agent Systems theory which has proven to be suitable for modeling epidemics (Epstein and Axtell, 1996; Reynolds and Dixon, 2000; F., 2001; Koopman, 2006; Auchincloss and Diez Roux, 2008). In

order to synthesize the population in a city under study and investigate how people transmit airborne viruses and respond to epidemics, we need to outline the attributes of people with respect to epidemiological and sociological characteristics, and model people’s daily behavior, the occurrence of contacts and subsequent infections.

2.2.1. Attributes and Classification of People

The selection of attributes of people is determined by the virological, medical, sociological and demographical data that is available to support our models. In general, we consider age, gender, susceptibility to epidemics, immunity to certain viruses, social status, infection status (susceptible, infected, infectious, treated or cured), Housing SL and Office SL etc. The Housing SL indicates the place where a person rest especially at night, including home and dormitories etc.; in contrast, the Office SL indicates the place where a person spends time on working (for adults) or studying (for students) during day time. Please note that study activities of students are also regarded as work activities. Initially assigning values to these attributes for each person depends on the actual statistical distribution or rules deduced from available data. For example, the age distribution can be obtained from national census; the distribution of the distance between one’s Housing SL and Office SL for people living in a given city can be estimated based on questionnaires. Setting one’s Housing SL and Office SL complies with the following procedure: (1) each person is initially attached to a Housing SL, taking into account household formation rules regarding age, gender, and family size etc.; (2) a distance value between the Housing SL and the Office SL is drawn from a certain distribution; (3) a Office SL is randomly selected on the city map at proximately a distance of the above value away from the Housing SL. Once set, some attributes are kept constant throughout simulations, while others can change over simulation time. For instance, the infection status of a person can be set susceptible (healthy) at the beginning, and then change in response to the occurrences of certain events such as infections.

All individuals are classified according to age structure and lifestyles, as

given in Table 2. Subsequent modeling of people’s activities (in Sec. 2.2.2) is applied to this 5 classifications because it is believed that daily activity patterns are related to individuals’ socioeconomic characteristics such as household role, lifestyle and life cycle (Kulkarni and McNally, 2000; Yang et al., 2007).

TABLE 2

2.2.2. Daily Agenda

People conduct diverse daily activities in sublocations. The daily activities consist of working, staying at home, relaxing at different recreational places, staying in hospital after getting infected, etc. People engage in each activity in a specific class of sublocation (the classification is given in Table 1). Specifically, people work in Office SLs, stay home in Housing SLs, shop/do sport/enjoy entertainment in Recreational SLs, get treatment in Patient Room SLs and study in Classroom SLs. The types of activities, the corresponding places where these activities take place and the involved people classes are listed in Table 3, based on research reported in (Valle et al., 2006; Yang et al., 2007). Additionally, the reader is referred to Table one in (Del Valle et al., 2007) for the distribution of average duration by activity type. For instance, the average duration of Home activity is 12 h 24 min with a standard deviation of 5 h 8 min, and the average duration of Work activity is 3 h 4 min with a standard deviation of 2 h 29 min.

TABLE 3

The generation of the daily agenda of an individual is subject to daily activity patterns, depending on which classification this individual is categorized into. As for the majority group of people whose main activities are working, we generate their daily agenda according to the research in (R and K, 2000; J et al., 2008; Min et al., 2008). 6 activity patterns are adopted as shown in Table 4 where “*” stands for possible activities other than Home and Work. The percentages are taken from (Min et al., 2008), based on a survey accomplished in a China city Shangyu. In simulations, a Recreation or Medical Care activity will be generated to substitute “*”.

TABLE 4

Once an individual has finished an activity, he/she moves by either public or personal transportation from the current location to another sublocation where the next activity is going to take place. The travel routing based on either RN or PTN can be computed according to Sec. 2.1.3, and the required time can be also estimated taking into account the travel means, the start-point and the end-point.

Furthermore, individuals' knowledge of global epidemic situation such as the alert phases issued by WHO, and their own infection status, can influence their behavior which succeedingly is reflected in the generation of daily agenda. For example, when one is aware of the severe prevalence of some epidemic or the diagnosis of own infection, he/she probably prolongs his/her stay at home, decreases work time and avoids crowded places such as recreational SLs. Therefore, the parameters for generating activities can be tuned to adapt to different situations.

2.2.3. Infections Due to Contacts

People encounter and have contacts with others when conducting activities or traveling, so they possibly get infected with airborne viruses when epidemics are prevalent. Let σ be the mean number of transmission events per hour of contact between fully infectious and fully susceptible people. For events that occur randomly in time, the number of occurrences in a period of time of length t obeys a Poisson probability law with parameter σt . Thus, the probability of no occurrences in time interval t is $e^{-\sigma t}$ and the probability of at least one occurrence is $1 - e^{-\sigma t}$. When an infectious individual i and a susceptible individual j stay within a distance threshold D^* (tunable for epidemics) from each other in the same sublocation for a certain period of time T_{ij} (recordable in simulations), infection can occur with a probability of $P_{ij} = 1 - e^{-\sigma T_{ij}}$. According to (Chowell et al., 2007; Del Valle et al., 2007), σ can be estimated based on knowledge of past epidemics. For simplicity, each individual is assumed to wander around

inside a sublocation during the stay and his/her accurate coordinates are obtainable. Thus the distance between two that stay in the same sublocation can be measured to assess whether it is less than D^* .

2.2.4. Disease Progression

Disease progression can be simply described by stages of (1) incubation with assumed non-infectiousness, (2) symptomatic period with infectiousness and (3) recovery/death (Mei et al., 2010a). For some airborne diseases such as influenza, a susceptible individual can refrain from getting infected by vaccination. Therefore, individuals can become immunized by either natural immunization (recovery from the previous infection) or vaccination. Therefore 3 parameters of $D_{\text{incubation}}$, $D_{\text{symptomatic}}$ and $D_{\text{vaccination}}$ are introduced to our model, indicating the duration of the incubation stage, the symptomatic stage and the duration that vaccination needs to stimulate immunity, respectively. For example, we can set $D_{\text{incubation}} = 1 \sim 2$, $D_{\text{symptomatic}} = 1 \sim 7$ and $D_{\text{vaccination}} = 7 \sim 21$ days for influenza A (H1N1) (Mei et al., 2010b).

3. GIS-based Implementation and Visualization

Based on available GIS data, we implemented the model and described into a simulation environment which can further allows for scenario testing and decision support. Fig. 5 displays the visualization of a real city. Roads are shown as lines, bus/metro stops as squares, buses/metros as stars, and persons as circles. All these objects are stored, queried and manipulated efficiently based on GIS. When simulations are running, stars and circles are moving on the 2-dimensional map, representing that buses/metros operate along lines and people conduct daily activities according to their own agenda. Thus, we can record infection events and make statistical analyses of the spreading of airborne infectious diseases, e.g., locating where first infections take place, determining in which kind of sublocation (office and buses etc.) most infections occur, and illustrating the spreading situation (total patients and infection rate etc.) in each city region.

FIGURE 5

4. Conclusion

We have developed a novel system that integrates the most relevant geospatial and dynamical information required to assess the potential outbreak of airborne diseases in an urban environment. We combine GIS data with traffic and mobility patterns as well as knowledge on behavioral aspects. The information is represented in a dynamical multi-agent simulation system. The system allows for interactively exploring various alternative scenarios to support decision making and prevention, prediction and recovery of an outbreak.

In the future, our study will be focused on the parallelization and distribution of the system to support large-scale simulations. Although the system is currently being used to understand in retrospect the outbreak of influenza in a few selected densely populated small cities in China, the challenge of execution performance holds back the application of the system to simulating airborne infectious diseases in large cities with a population of, say, millions.

Competing interests

The authors declare that they have no competing interests.

Acknowledgments

This work was supported by China National Scientific Fund (No. 91024030 & No. 91024015), ViroLab (Sloot et al., 2009) and the European DynaNets (www.dynanets.org) grant (EU Grant Agreement Number 233847). The Research was also partly sponsored by a grant from the ‘Leading Scientist Program’ of the Government of the Russian Federation, under contract 11.G34.31.0019. In particular, we thank Dr. Viktor Müller and Qing Xu for their helpful suggestions.

References

- Auchincloss, A. H., Diez Roux, A. V., 2008. A new tool for epidemiology: The usefulness of dynamic-agent models in understanding place effects on health. *American Journal of Epidemiology* 168 (1), 1–8.
- Chowell, G., Nishiura, H., Bettencourt, L., 2007. Comparative estimation of the reproduction number for pandemic influenza from daily case notification data. *Journal of The Royal Society Interface* 4, 155C166.
- Del Valle, S. Y., Hyman, J. M., Hethcote, H. W., Eubank, S. G., 2007. Mixing patterns between age groups in social networks. *Social Networks* 29 (4), 539–554.
- Epstein, J. M., Axtell, R., 1996. Growing artificial societies: social science from the bottom up. The MIT Press (November 8, 1996).
- F., H., 2001. The science of self-organization and adaptivity.
- Funk, S., Salathé, M., Jansen, V. A. A., 2010. Modelling the influence of human behaviour on the spread of infectious diseases: a review. *The Royal Society* 7 (50), 1247–1256.
- J, R. M., J, M. E., N, H. K. M., 2008. Validation of tasha : a 24-h activity scheduling microsimulation model. *Transportation Research Part A* 42 (2), 360–375.
- Koopman, J., 2006. Models of infectious disease agent study. *Am J Epidemiol* 163 (SUPPL.).
- Kulkarni, A. A., McNally, M. G., 2000. A microsimulation of daily activity patterns. Tech. Rep. UCI-ITS-AS-WP-00-7, www.its.uci.edu.
- Mabry, P. L., Olster, D. H., Morgan, G. D., Abrams, D. B., 2008. Interdisciplinarity and systems science to improve population health: A view from the nih office of behavioral and social sciences research. *American Journal of*

- Preventive Medicine 35 (2, Supplement 1), S211–S224, 0749-3797 doi: DOI: 10.1016/j.amepre.2008.05.018.
- Mei, S., Sloot, P., Quax, R., Zhu, Y., Wang, W., 2010a. Complex Agent Networks explaining the HIV epidemic among homosexual men in Amsterdam. *Mathematics and Computers in Simulation* 80 (5), 1018–1030.
- Mei, S., Vijver, D. v. d., Xuan, L., Zhu, Y., Sloot, P., 2010b. Quantitatively Evaluating Interventions in the Influenza A (H1N1) Epidemic on China Campus Grounded on Individual-based Simulations. In: *the International Conference on Computational Science 2010 (ICCS 2010)*. Amsterdam, the Netherlands, pp. 1669–1676.
- Min, Y., Xuewu, C., Wei, W., Tao, W., 2008. Commuters’ trip generation model based on activity patterns. *JOURNAL OF SOUTHEAST UNIVERSITY (Natural Science Edition)* 38 (3), 525–530.
- Ministry of Health of China, 2009. Report on the prevention and control information of Influenza A [H1N1] by Ministry of Health of China.
URL <http://www.moh.gov.cn>
- Newman, M. E. J., 2003. The structure and function of complex networks. *SIAM Review* 45 (2), 167–256.
- Nyerges, T., Rob, K., Nigel, T., 2009. GIS and society. In: *International Encyclopedia of Human Geography*. Elsevier, Oxford, pp. 506–512.
- R, B. C., K, S. S., 2000. A comprehensive daily activity-travel generation model system for workers. *Transportation Research Part A* 34 (1), 1–22.
- Reynolds, W. N., Dixon, D. S., 2000. A general framework for representing behavior in agent based modeling. In: *Complex Systems and Policy Analysis: New Tools for a New Millennium*. Arlington VA.
- Sloot, P. M. A., Coveney, P. V., Ertaylan, G., Müller, V., Boucher, C. A., Bubak, M., 2009. HIV Decision Support: From Molecule to Man. *Phil. Trans. R. Soc. A* 367 (1898), 2691–2703.

Valle, S. D., Kubicek, D., Mniszewski, S., Riese, J., Romero, P., Smith, J., Stroud, P., Sydoriak, S., January 31, 2006 2006. EpiSimS Los Angeles Case Study. Tech. rep., Los Alamos National Laboratory.

Yang, Y., Atkinson, P., Ettema, D., 2007. Individual space-time activity-based modelling of infectious disease transmission within a city. J. R. Soc. Interface 5, 759C772.

Table 1: Regions and Sublocations

Region Type	Secondary Sublocation (SL) Classes
Housing Region	Housing SLs: houses, apartments...; Office SLs: community service offices...; Recreational SLs: shops, community gardens...; Classroom SLs: children daycare...
Office Region	Office SLs: offices, factory workshops...; Recreational SLs: cafeteria, sport places, restaurants...
School Region (for elementary, middle and high schools)	Housing SLs: faculty members' households...; Office SLs: teachers' offices...; Classroom SLs: classrooms, labs and library space...; Recreational SLs: cafeteria, shops, refectories...
University Region	Housing SLs: student dormitories, faculty members' households...; Office SLs: teachers' offices...; Classroom SLs: classrooms, labs and library space...; Recreational SLs: cafeteria, clubs, shops, refectories...
Medical Region	Office SLs: doctors' offices...; Patient Room SLs: medical wards...; Recreational SLs: refectories...
Recreational Region	Recreational SLs: all kinds of retail, service, meal and shop SLs

Table 2: Age structure for people classification

Classification	Description
Children under 3 years	For children under 3 years, it is assumed that they do not have independent activities and always stay inside households.
Children between 3 and 18 years	Their activity patterns are assumed to be simple: go to daycare or school at school hours and stay inside households at all other times.
Adults between 18 and 60 years except college students	They go to work at working places during day time and stay inside households during night. They visit recreational places from time to time.
College students between 18 and 25	They go to colleagues or universities during day time and stay inside dormitories during night. They visit recreational places very often.
Adults over 60 years	They stay around households during day time and stay inside households during night. They visit recreational places less often.

Table 3: Activity types

Activity Types	Places	Involved People Classes
Work (W)	Office SLs, Classroom SLs (for students), Recreational SLs (for salesmen and waiters etc.), Patient Room SLs (for doctors and nurses)	All but children under 3 years and adults over 60 years
Home (H)	Housing SLs	All 5 classes
Medical Care (M)	Patient Room SLs (for patients)	All 5 classes
Recreation (R)	Recreational SLs (for consumers)	The latter 3 classes

Table 4: Activity Patterns

Activity Patterns	Percentages(%)
HWH	53.4
HWH*H	10.3
HW*WH	2.7
HWHWH	27.1
HWHWH*H	6.5

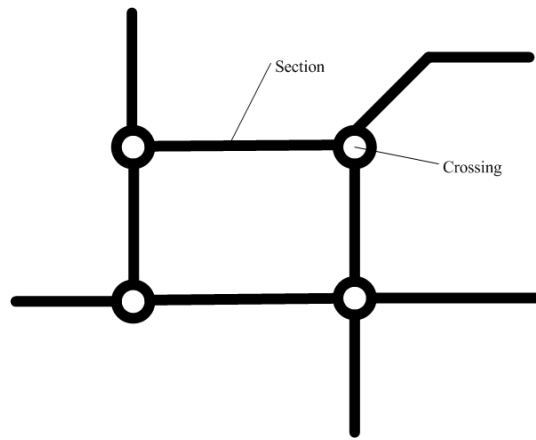


Figure 1: Road Network

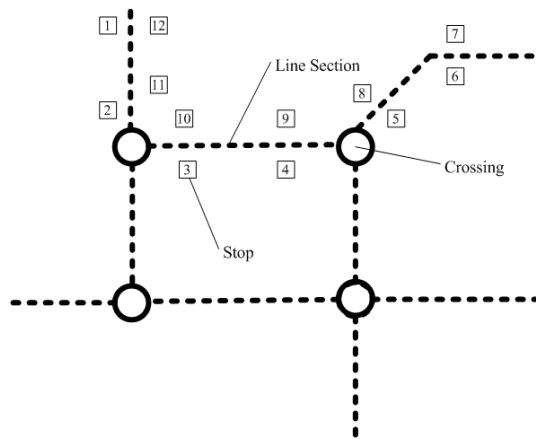


Figure 2: Public Transportation Network

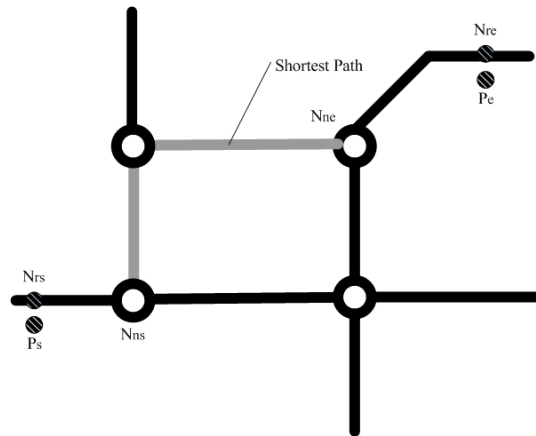


Figure 3: Travel Routing for the Shortest Path

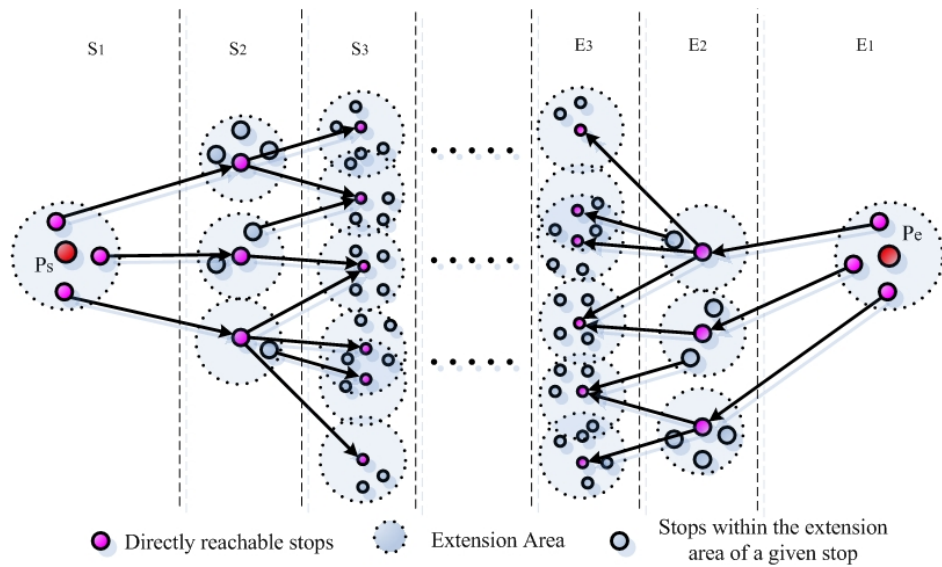


Figure 4: Travel Routing by Public Transportation

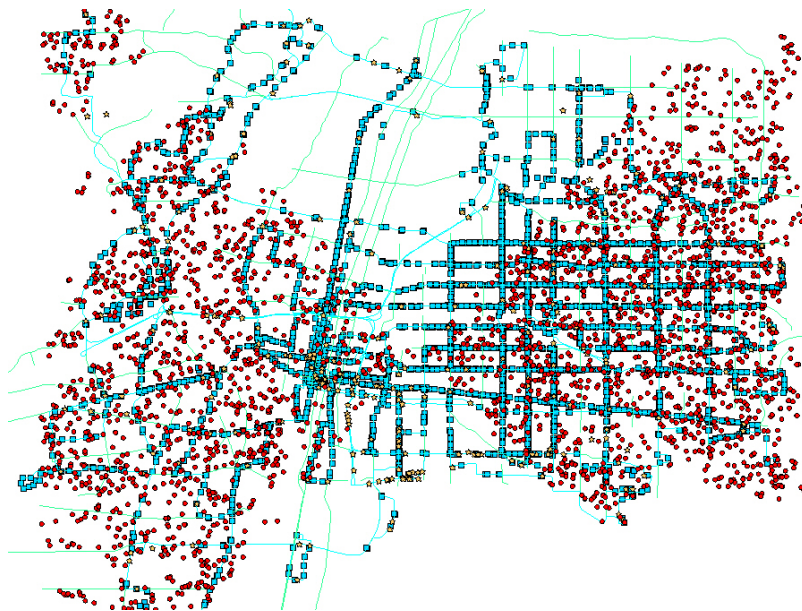


Figure 5: City Visualization